



LONG LIFE  
DESIGN





# GA-100T (BRIGHT PLAIN)

category: carpet tile

Plain pattern inspired by splendor in the grass.  
Beautiful texture with shiny dots woven in  
the big loops.


**GOOD DESIGN LONG LIFE DESIGN  
AWARD-winning product in 2015.**

Composition	surface	BCF Nylon 100%	dyeing method of yarn	Piece Dyed	
	base fabric	Nonwoven Polyester	backing	PVC and Glass Fiber	
Specification	size	500mm×500mm	overall thickness	7.8mm	
	pile height	5.5 to 3.0mm (textured loop pile)			
	gauge	1/10	stitch	12.5	yarn weight (oz/sq.yd)
Packing	20pcs/box = 5m <sup>2</sup> /box				
Net Weight	24.0kg/box				
Performance	Critical Radiant Flux	(ASTM E648)	Class 1 Average CRF 0.45/cm <sup>2</sup> or higher		
	Smoke Density	(ASTM E662)	Less than 450		
	Flame-retardant	Fire Defense Law in Japan Authorized No.E2170232			
	Antistatic	Less than 1.0kV (JIS L 1021-16, at 23 degrees centigrade, 25%RH)			
	Stain-resistant	Stain Release			
Formaldehyde Radiation	F☆☆☆☆ Interior-fabrics Performance Evaluation Conference Certified No.J17-31265				
Way of Installation	 Monolithic    or  Quarter Turn				
Recommended Adhesive from TOLI	TOLI ECO GA Cement	(required quantity)	for steel or plastic sub-floor	40 to 60 gram/m <sup>2</sup>	
			for mortar and wood sub-floor	60 to 100 gram/m <sup>2</sup>	
Notes on Installation	<ul style="list-style-type: none"> <li>Apply the adhesive on the whole surface of the sub-floor thinly and evenly. After drying, when the adhesive becomes translucent, install the tiles. Be careful not to put the tiles too tightly.</li> </ul>				
Others	<ul style="list-style-type: none"> <li>In Monolithic installation, when the color difference between the tiles stands out or the joints are visible, please switch the tiles partly.</li> <li>Please note that the product has the indigenous odor from its materials.</li> <li>Right after installation, color shading could be seen on the floor. This is just because surface piles partially lie down. With the passage of time, it will disappear.</li> </ul>				
Custom Order	All the standard colors of GA-100T can be made with Nano Clean finish (patent-obtained special stain release) on a made-to-order basis. For more information, please contact TOLI sales reps.				


MADE IN JAPAN



GA10232T




GA10232T




GA10233T



GA10234T



GA10235T



GA10236T



# GA-100T (BRIGHT PLAIN)


category: carpet tile




Carpet Tile




▲ GA10232T/GA10234T



|| GA10225T



|| GA10226T



|| GA10227T



LONG LIFE  
DESIGN





# GA-100T (SPEAR LINE)

category: carpet tile

Sterically-made sharp linear pattern.  
Characterized by fine expression of shiny  
yarns and dynamic image akin to KASURI.  
**GOOD DESIGN LONG LIFE DESIGN AWARD-  
winning product in 2015.**

Composition	surface	BCF Nylon 100%	dyeing method of yarn	Piece Dyed	
	base fabric	Nonwoven Polyester	backing	PVC and Glass Fiber	
Specification	size	500mm×500mm		overall thickness	7.5mm
	pile height	H5.0mm/M4.0mm/L3.0mm (textured loop pile)			
	gauge	1/10	stitch	12.0	yarn weight (oz/sq.yd)
Packing	20pcs/box = 5m <sup>2</sup> /box				
Net Weight	24.0kg/box				
Performance	Critical Radiant Flux	(ASTM E648)	Class 2 Average CRF 0.22/cm <sup>2</sup> or higher		
	Smoke Density	(ASTM E662)	Less than 450		
	Flame-retardant	Fire Defense Law in Japan Authorized No.E2170233			
	Antistatic	Less than 1.0kV (JIS L 1021-16, at 23 degrees centigrade, 25%RH)			
	Stain-resistant	Stain Release			
Formaldehyde Radiation	F☆☆☆☆ Interior-fabrics Performance Evaluation Conference Certified No.J17-31266				
Way of Installation	Monolithic or  Quarter Turn				
Recommended Adhesive from TOLI	TOLI ECO GA Cement	(required quantity)	for steel or plastic sub-floor	40 to 60 gram/m <sup>2</sup>	
			for mortar and wood sub-floor	60 to 100 gram/m <sup>2</sup>	
Notes on Installation	◆Apply the adhesive on the whole surface of the sub-floor thinly and evenly. After drying, when the adhesive becomes translucent, install the tiles. Be careful not to put the tiles too tightly.				
Others	◆The stripes differ in position on a tile-by-tile basis so that they will not be exactly connected between the tiles (please refer to the installation image). ◆In Monolithic installation, when the color difference between the tiles stands out or the joints are visible, please switch the tiles partly. ◆Please note that the product has the indigenous odor from its materials. ◆Right after installation, color shading could be seen on the floor. This is just because surface piles partially lie down. With the passage of time, it will disappear.				
Custom Order	All the standard colors of GA-100T can be made with Nano Clean finish (patent-obtained special stain release) on a made-to-order basis. For more information, please contact TOLI sales reps.				

MADE IN JAPAN



▲ GA10333T/TTN3128 (LL FREE 50 NW-EX · page 321)



# GA-100T (SOFT GRID)

category: carpet tile

Soft-textured lattice pattern. With its beautiful crisscross shading, classy atmosphere can be created in your space. **GOOD DESIGN LONG LIFE DESIGN AWARD-winning product in 2015.**

Carpet Tile

Composition	surface	BCF Nylon 100%	dyeing method of yarn	Piece Dyed		
	base fabric	Nonwoven Polyester	backing	PVC and Glass Fiber		
Specification	size	500mm×500mm		overall thickness	7.8mm	
	pile height	5.0 to 3.0mm (textured loop pile)				
	gauge	1/10	stitch	14.0	yarn weight (oz/sq.yd)	17.1
Packing	20pcs/box = 5m <sup>2</sup> /box					
Net Weight	24.0kg/box					
Performance	Critical Radiant Flux	(ASTM E648)	Class 2 Average CRF 0.22/cm <sup>2</sup> or higher			
	Smoke Density	(ASTM E662)	Less than 450			
	Flame-retardant	Fire Defense Law in Japan Authorized No.E2170234				
	Antistatic	Less than 1.0kV (JIS L 1021-16, at 23 degrees centigrade, 25%RH)				
	Stain-resistant	Stain Release				
	Formaldehyde Radiation	F☆☆☆☆ Interior-fabrics Performance Evaluation Conference Certified No.J17-31267				
Way of Installation	Monolithic or  Quarter Turn					
Recommended Adhesive from TOLI	TOLI ECO GA Cement (required quantity)	for steel or plastic sub-floor		40 to 60 gram/m <sup>2</sup>		
		for mortar and wood sub-floor		60 to 100 gram/m <sup>2</sup>		
Notes on Installation	◆Apply the adhesive on the whole surface of the sub-floor thinly and evenly. After drying, when the adhesive becomes translucent, install the tiles. Be careful not to put the tiles too tightly.					
Others	◆In Monolithic installation, when the color difference between the tiles stands out or the joints are visible, please switch the tiles partly. ◆Please note that the product has the indigenous odor from its materials. ◆Right after installation, color shading could be seen on the floor. This is just because surface piles partially lie down. With the passage of time, it will disappear. ◆The linear pattern may not be strictly straight, which is the characteristic of this particular product with a fabric image.					
Custom Order	All the standard colors of GA-100T can be made with Nano Clean finish (patent-obtained special stain release) on a made-to-order basis. For more information, please contact TOLI sales reps.					

MADE IN JAPAN



GA10632T




GA10635T



GA10633T



GA10635T



GA10634T



GA10636T



GA10632T



**LONG LIFE DESIGN**



# GA-100T (SHINE MARBLE)

category: carpet tile

Beautiful pattern reminiscent of shiny marble stone.  
3 dimensional loop-pile structure and non-directional design will convey a spacious feeling on the floor.  
**GOOD DESIGN LONG LIFE DESIGN AWARD-winning product in 2015.**

Composition	surface	BCF Nylon 100%		dyeing method of yarn	Piece Dyed	
	base fabric	Nonwoven Polyester		backing	PVC and Glass Fiber	
Specification	size	500mm×500mm		overall thickness	7.5mm	
	pile height	6.5 to 3.0mm (textured loop pile)				
	gauge	1/10	stitch	12.0	yarn weight (oz/sq.yd)	15.9
Packing	20pcs/box = 5m <sup>2</sup> /box					
Net Weight	25.5kg/box					
Performance	Critical Radiant Flux	(ASTM E648)	Class 2 Average CRF 0.22/cm <sup>2</sup> or higher			
	Smoke Density	(ASTM E662)	Less than 450			
	Flame-retardant	Fire Defense Law in Japan Authorized No.E2200143				
	Antistatic	Less than 1.0kV (JIS L 1021-16, at 23 degrees centigrade, 25%RH)				
	Stain-resistant	Stain Release / ◆ Stain Release (NANO CLEAN)				
Formaldehyde Radiation	F <sup>19</sup> ☆☆☆☆ Interior-fabrics Performance Evaluation Conference Certified No.J20-31583					
Way of Installation	Monolithic or  Quarter Turn					
Recommended Adhesive from TOLI	TOLI ECO GA Cement	(required quantity)	for steel or plastic sub-floor	40 to 60 gram/m <sup>2</sup>	for mortar and wood sub-floor	60 to 100 gram/m <sup>2</sup>
Notes on Installation	◆Apply the adhesive on the whole surface of the sub-floor thinly and evenly. After drying, when the adhesive becomes translucent, install the tiles. Be careful not to put the tiles too tightly.					
Others	◆In Monolithic installation, when the color difference between the tiles stands out or the joints are visible, please switch the tiles partly. ◆Please note that the product has the indigenous odor from its materials. ◆Right after installation, color shading could be seen on the floor. This is just because surface piles partially lie down. With the passage of time, it will disappear.					
Custom Order	All the standard colors of GA-100T can be made with Nano Clean finish (patent-obtained special stain release) on a made-to-order basis. For more information, please contact TOLI sales reps.					

MADE IN JAPAN



GA10712T



GA10711T ◆



GA10714T ◆



GA10712T



GA10715T



GA10713T



GA10716T



## NANO CLEAN

"Nano Clean" provides more excellent stain resistance to soils by adding special Nano finish to the existing stain release by fluoridation.

※◆The color codes marked with "Nano Clean" have Nano Clean finish on the surface.





# GA-100T (SHINE MARBLE)

category: carpet tile



Carpet Tile



▲ GA10714T/GA10715T




|| GA10717T



|| GA10718T



|| GA10719T

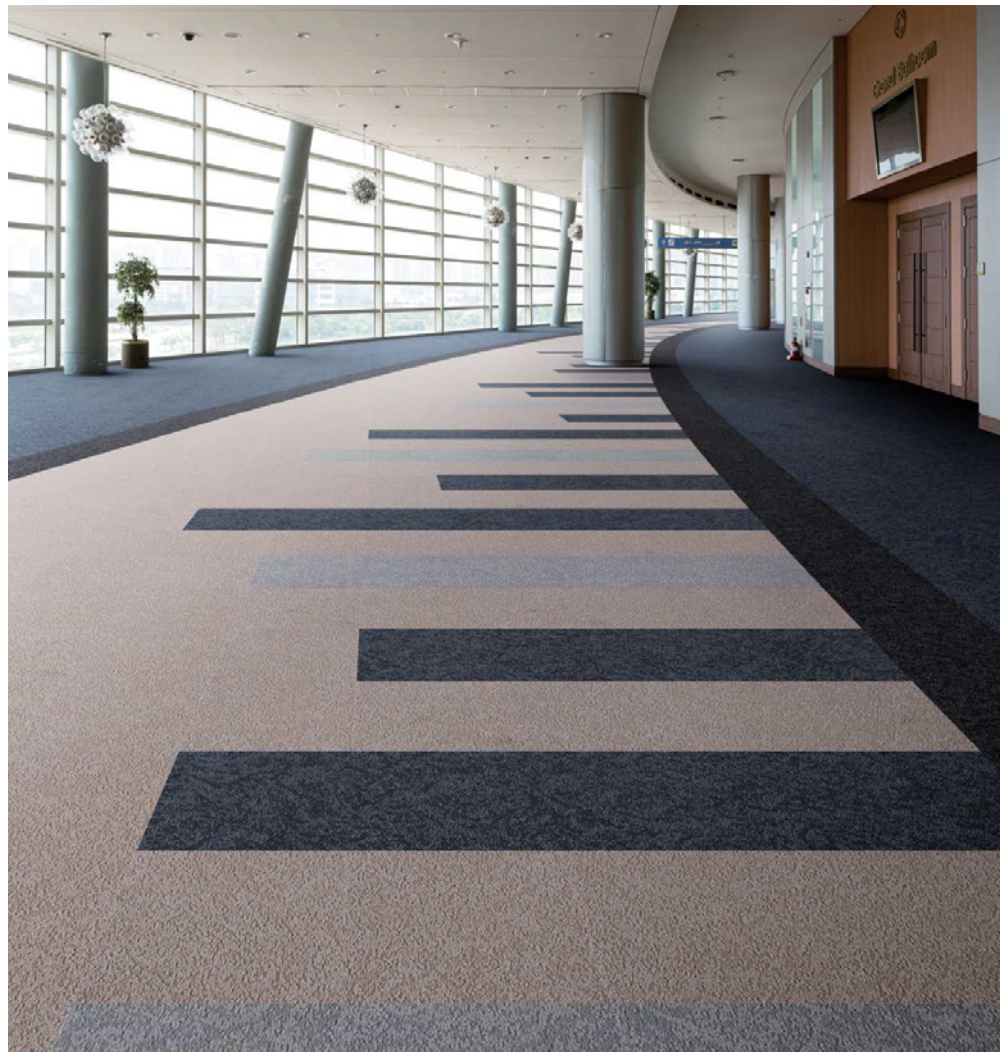

▲ GA10711T/GA10714T/GA10716T/GA10718T